
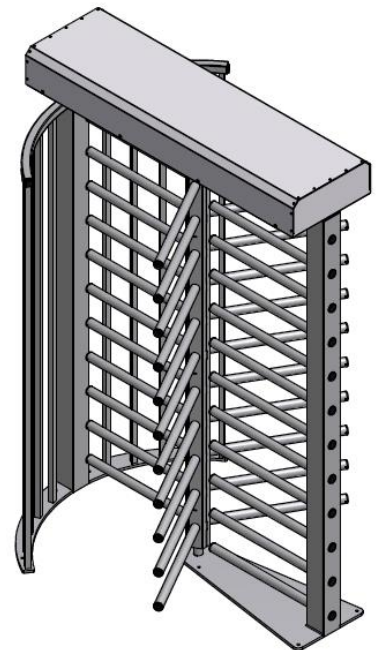


## Technical Data Turnstile DK 2 (electromechanical system)

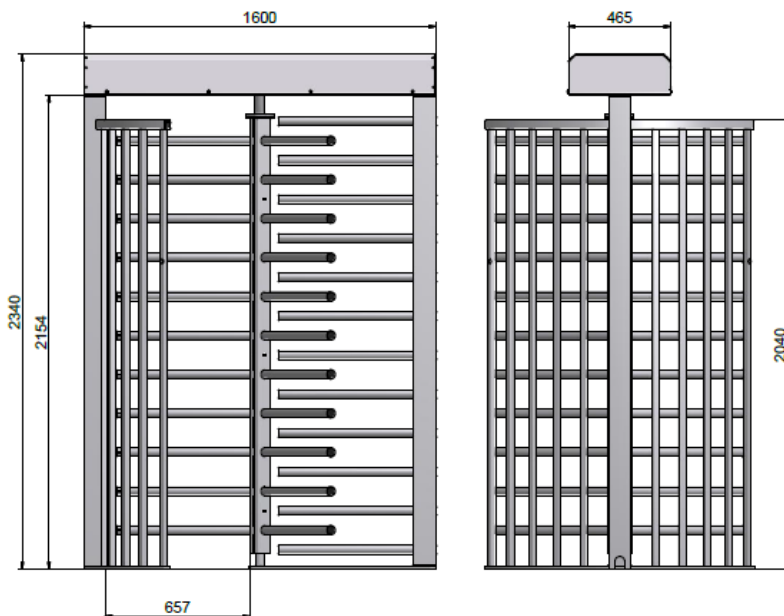

<b>Outside dimensions</b>	W=1.6 m; H=2.34 m (floor mounting); D=1.3 m
<b>Access dimensions</b>	Access height 2.15 m; Access width 0.65 m
<ul style="list-style-type: none"> <li>- Fixed element-, guiding rack (40 mm steel tube) hot dipped galvanized</li> <li>- Turning spindle (40 mm steel tube, hot dipped galvanized) with 3 x 120° partition</li> <li>- Automated release per lifting magnet, manual rotational movement</li> <li>- Top box out of aluminium, powder coated in RAL7040 (window grey) rough structure</li> <li>- Control electronics in aluminium top box; power supply 230V</li> <li>- Access control components in post mounted boxes (optional)</li> <li>- Capacity: ca. 15 persons/minute</li> <li>- Ready to use delivery for floor mounting with transporting frame</li> <li>- Various options and accessories (see <a href="#">FMT-0059_Drehkreuz_Checkliste_e</a>)</li> </ul> <p style="text-align: center; font-size: small;">Illustrations, weights, dimensions are not binding, technical changes are reserved</p>	