


Technical Data Electrical Barrier ES 3 / 4

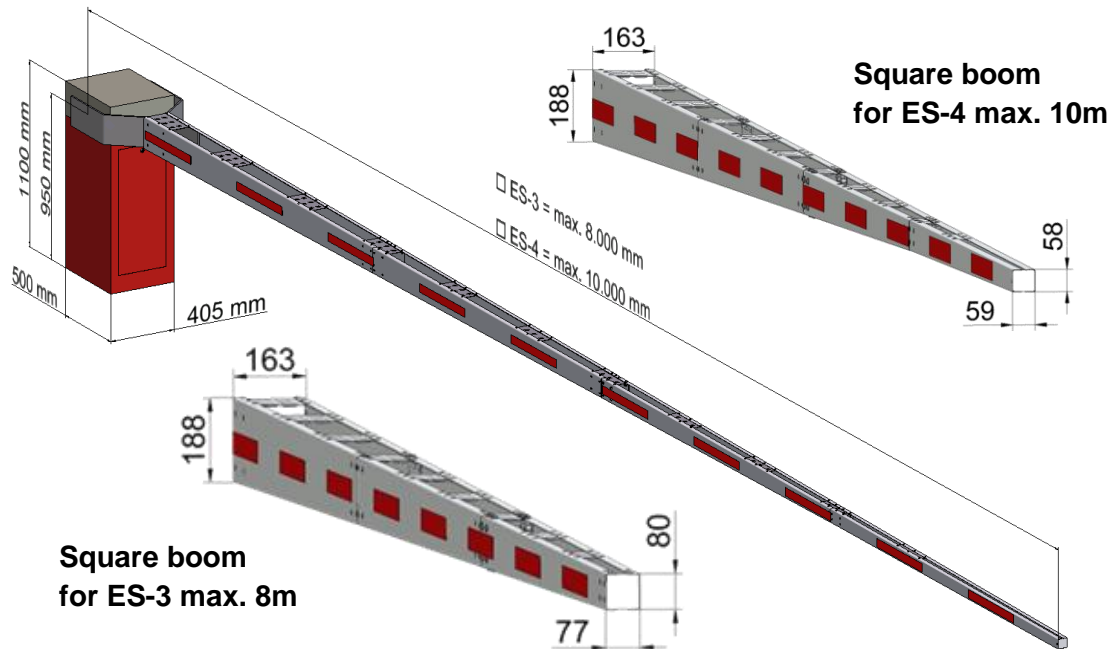

Electrical barrier	ES-3	ES-4
Motor	230 V	ES-3/4 = 50 Hz; 0,37 KW, 1400 /min
Housing	Stainless steel Housing of ES-4 is reinforced	
Gearbox	Spur-gearbox with friction clutch i=600:1	
Limit switch	Reed-switch: contactless, no freezing	
Power consumption	At 230 V 0,9 A during running time	
Engine control	Micro pc with fc, power cut off to be activated	
Running time	OPEN/CLOSE: ES-3 = 6,0 sec. ES-4 = 11,0 sec.	
Color (Standard)	RAL3000 (red), RAL7030 (grey), rough texture	

Illustrations, weights, dimensions are not binding, technical changes are reserved