



Technical Data Electrical Barrier ES 0 / 1 / 2

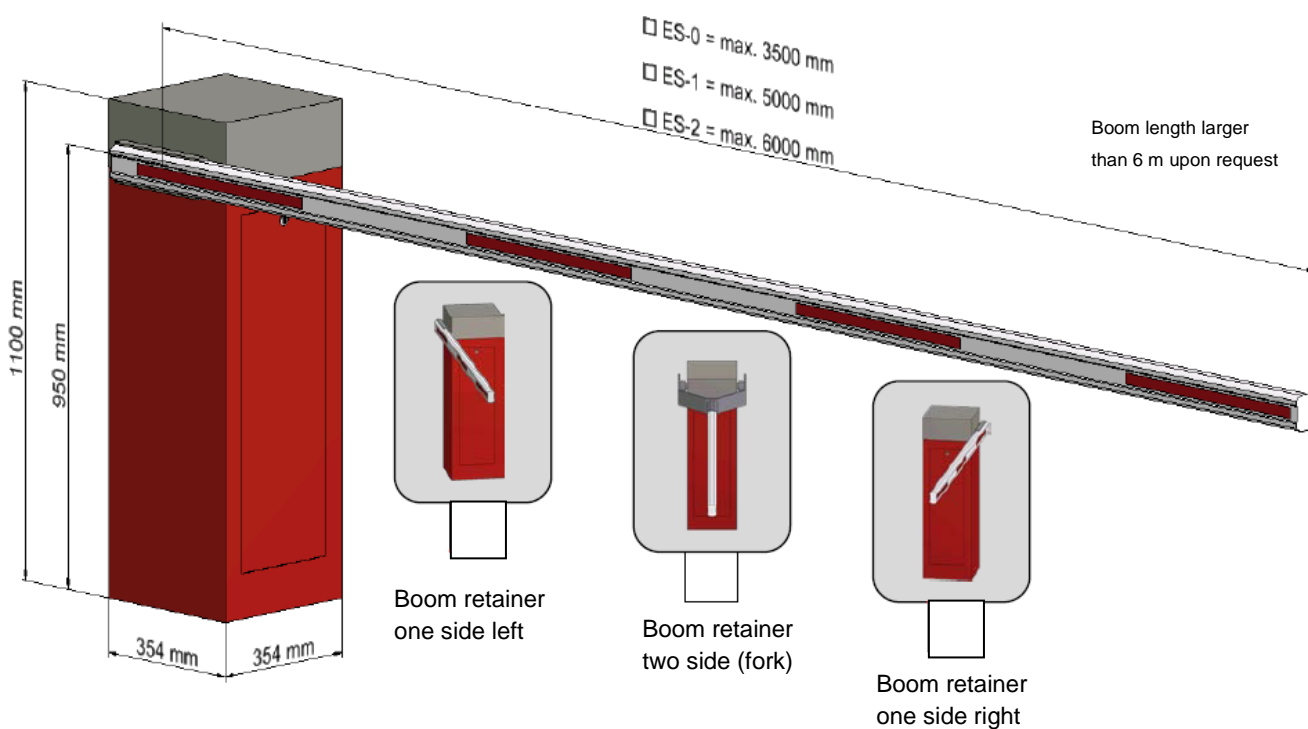

Electrical barrier	ES-0	ES-1	ES-2
Motor	230 V	ES-0/1/2 = 50 Hz; 0.37 KW, 1400 /min	
Housing	Stainless steel		
Gearbox	Spur-gearbox with friction clutch i=212:1		
Limit switch	Reed-switch: contactless, no freezing		
Power consumption	At 230 V 0.9 A during running time		
Engine control	Micro pc with fc, power cut off to be activated		
Running time	OPEN/CLOSE: ES-0 = 2.1 sec. ES-1/2 = 4.2 sec.		
Color (Standard)	RAL3000 (flame red), RAL7030 (stone grey), rough texture		



Polygonal profile

In addition round, diameter 80. 90. 100 mm

Illustration, weights, dimensions are not binding, technical changes are reserved

Kerfa GmbH
Bereich Axel Tiede Sicherheitstechnik
An der Kohlenbahn 30
58135 Hagen
Deutschland

Telefon: +49 2331 9461-25
Telefax: +49 2331 9461-48
E-Mail: info@axel-tiede.de
Internet: www.axel-tiede.de

Sitz der Gesellschaft: Hagen
Amtsgericht Hagen HRB 3184
Steuer-Nr.: 321/5714/0545
USt-IdNr.: DE126456025

Geschäftsführung:
Konrad Meyr