Axel Tiede®
Kerfa GmbH

Always safe

Technical Data Turnstile DK 2 (electromechanical system)

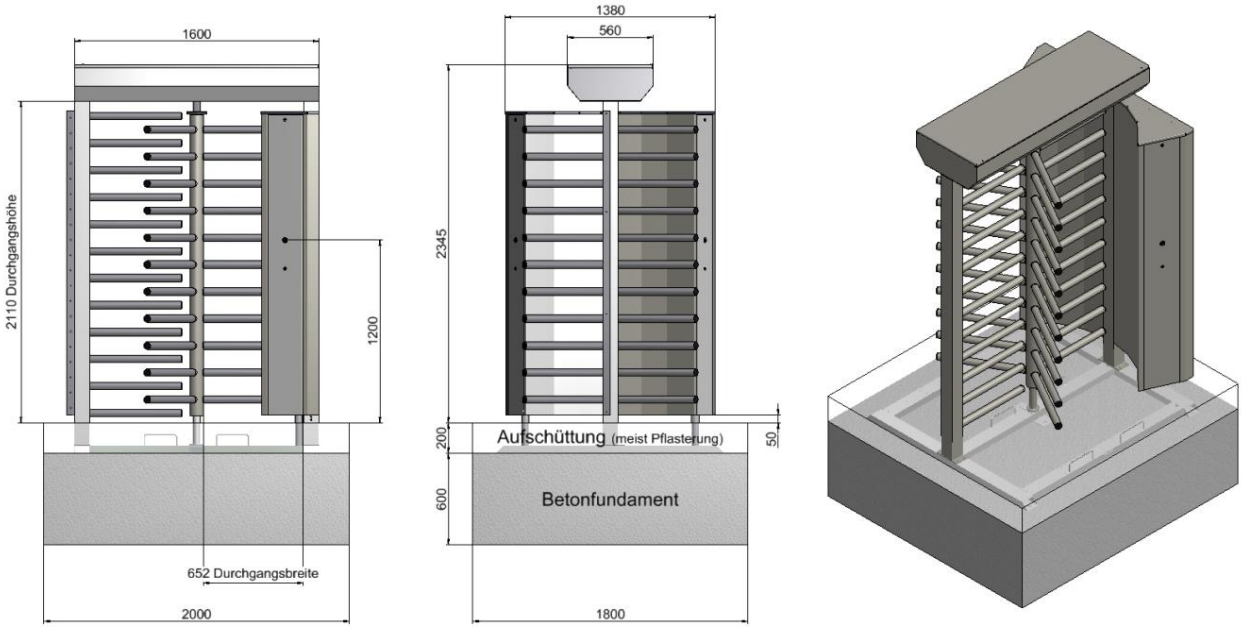

Outside dimensions	W=1.6 m; H=2.4 m (paved); T=1.4 m (at passing 0.65 m)
Access dimensions	Access height 2.11 m; Access width 0.65 m (poss. up to 1.5 m)

- **Automated release, manual rotational movement**
- **Stainless steel spindle with 3 x 120° partition, Fixed element arms out of 1½" stainless steel tube**
- **Control electronics in stainless steel top box; power supply (TNS) 230V, 50 Hz, 1 phas, neutral wire, protective conductor, pre-fuse 1 x 16 A, control voltage +24 V DC**
- **Access control components in aluminium side box**
- **Standard powder coating rough structure in RAL7030 (stone grey) or RAL7016 (anthracite grey)**
- **Capacity: ca. 15 persons/minute, Various roof models**
- **Ready to use delivery with transporting and mounting frame**
- **Custom solutions on request (Access widths, color, side passage)**

Illustrations, weights, dimensions are not binding, technical changes are reserved

Kerfa GmbH
Bereich Axel Tiede Sicherheitstechnik
An der Kohlenbahn 30
58135 Hagen
Germany

Phone: +49 2331 9461-25
Fax: +49 2331 9461-48
Email: info@axel-tiede.de
Internet: www.axel-tiede.de

Company headquarters: Hagen
Local court Hagen HRB 3184
Tax no.: 321/5714/0545
VAT ID no.: DE126456025

Managing Director:
Konrad Meyr